G) -2, -3 1/8 × 7×19 CARBON TINNED STEEL CABLE SPEC. ANRR-C-43.

C	TRACED	2-10-38	WEIR
D	Q6320 B4 WAS G6320 4 SEE CC 7131	3 15 38	SDW
E	CABLE SPEC 49C11 WAS C 70	7 20 38	WHITAKER
F	[illegible]		
G	REPLACED ENTIRE MTRL NOTE ... R-24-3. WITH NOTE "1/8 × 7×19 - SPEC ANRR-C-43." CH... PRE-STRETCH NOTE "... WAS ..." TO ... ...D NOTE "... TO BE ... AS PER SPEC SR15C NEG ...	4 ... 42	...

105 5/16 (8'-10 5/16)


(F) NAF310621 - B4 D -2

(F) NAF310621 -S210-4 RH

AN155-21S

(F) NAF310621 -S210-4... -3

(F) NAF310621 - B4 D

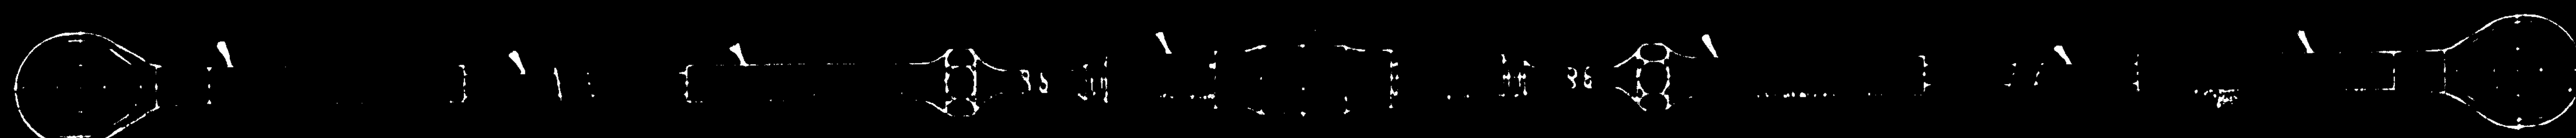

74 15/16 (6'-2 15/16)

1 3/8 REF.

30 (2'-6")

NOTES-

1. PRESTRETCH CABLE TO 1200# WHICH IS 60% OF RATED STRENGTH
2. CABLES TO BE COATED WITH PARALKATONE SPEC. RM61 TYPE B AS PER SPEC. SR15C. (G)
4. DIMENSIONS GIVEN ARE WITH 3 THREADS EXPOSED AT TURN BUCKLES.
5. SWAGE TERMINALS AS PER SPEC T 46-B. AS APPLICABLE

PBY-5A	...		
PBY-5	...		
PBY-5	...		
PBY-4	28C2000		
PBY-3	28C2000		
PBY-2	28C2000	AN155 21S	1
PBY-6A	...		

NAF310621-B4	2
NAF310621 -S210-4 RH	1
NAF310621 -S210-4 LH	1
-3	1
-2	1

2 16 38

12" = 1'-0"

NOTED | NOTED | NONE | SEE NOTE #2 | WEIR 11-3-37 | CK HWH | R

CONSOLIDATED AIRCRAFT CORP.

CABLE ASSEMBLY - S.B.A.E. CONTROL - ELEVATOR.

B 28C2114